


Scheitelwerte [m³/s]							
T	K1=BQ1	K2	K3	K4	K5=BQ2	K6	K7=BQ3
[a]	TG1	TG2	TG3	K1_ROU	K2+K4	K5_ROU	Mündung
2	0,875	0,393	0,216	0,875	1,008	1,008	1,060
5	1,383	0,642	0,347	1,383	1,584	1,584	1,662
10	1,845	0,869	0,467	1,845	2,115	2,115	2,209
20	2,377	1,127	0,604	2,377	2,715	2,715	2,825
50	3,174	1,511	0,810	3,174	3,613	3,613	3,758
100	3,839	1,831	0,982	3,839	4,361	4,361	4,538

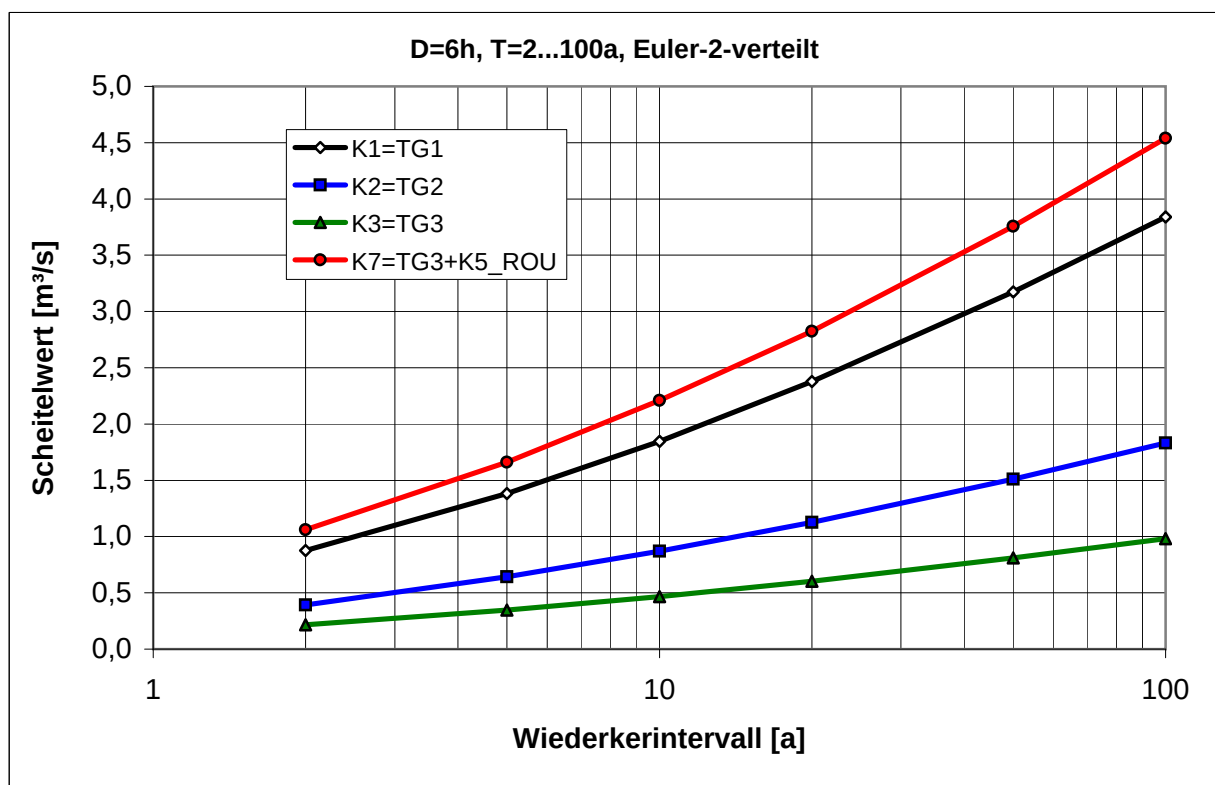

Wellenfällen [Tm³]							
T	K1=BQ1	K2	K3	K4	K5=BQ2	K6	K7=BQ3
[a]	TG1	TG2	TG3	K1_ROU	K2+K4	K5_ROU	Mündung
2	13,28	3,02	1,57	13,28	16,30	16,30	17,87
5	18,92	4,36	2,22	18,92	23,27	23,27	25,49
10	23,91	5,54	2,79	23,91	29,46	29,46	32,24
20	29,44	6,86	3,42	29,44	36,30	36,30	39,72
50	37,49	8,79	4,33	37,49	46,28	46,28	50,61
100	44,16	10,38	5,09	44,16	54,54	54,54	59,63

Erläuterung zu den Bezeichnungen der Knoten:

K1...K7 Modellknoten des FGM

K1_ROU K1 mit Wellenverschiebung (Routing) nach unten, 2 Zeitintervalle á 10 min

K5_ROU K2 mit Wellenverschiebung (Routing) nach unten, 2 Zeitintervalle á 10 min

Mündung K3+K6